



Safe Edge

Stylish, affordable and now available with LED technology

Safe Edge now offers a lamp life of up to 50,000 hours - many times that of a fluorescent equivalent, ideal for minimising the maintenance requirements of maintained exit signs.

Why choose Safe Edge?

Menvier Safe Edge has been fully restyled and redesigned to make it ideal for use in modern prestigious applications. The new design retains popular features such as the universal legend arrangement, which rotates through a full 90 degrees making one standard product suitable for mounting on walls, flat ceilings and even sloping ceilings. To maximise versatility, concealed surface cable entry facilities have been added, along with the existing full rear BESA cable facilities. Available in white or silver finish. The fitting provides clear direction along with good aesthetic appearance, making it suitable for use in a very wide range of applications.

Safe Edge is
stylish but
affordable, ideal
for everyday
projects



Controllable

All maintained self contained versions of Safe edge (fluorescent and LED) have an additional switched live connection to control the operation of the fitting under mains healthy conditions. When the legend is not required to be illuminated, the fitting can be set to non maintained mode by simply removing the switched live supply.

Setting the fitting to non maintained mode when appropriate, saves energy and conserves lamp life compared to having the lamp continuously lit whether needed or not.



Choice of Light Source Technology

Safe Edge is available with a traditional fluorescent light source, offering a low initial cost and ideal for applications where the fitting operates in non maintained mode, or is illuminated in maintained mode only for relatively short periods.

Alternatively, If fittings are regularly illuminated for significant periods of time, the use of LED technology offers massive maintenance benefits, providing up to 50,000 hours working life. This compares favourably to the typical 6,000 hour working life of a fluorescent equivalent.

As well as providing a massively longer working life, the use of LED technology provides an aesthetically pleasing bright, crisp illumination of the legend panel, ideally suited to prestigious applications. Furthermore, the use of LED technology also offers reduced energy consumption compared to traditional fluorescent methods.

The LED light strip is very easy to replace at the end of its life. Replacement LED strips can be purchased separately.

Safe Edge can
be wall or
ceiling mounted
as standard

Choice of Legends


Safe edge is available with standard European signs directive format legends, in addition it is also available with BS5499 format legends.

For simplicity, legends are ordered separately, refer to the ordering table overleaf for legend details.

3YEAR
GUARANTEE





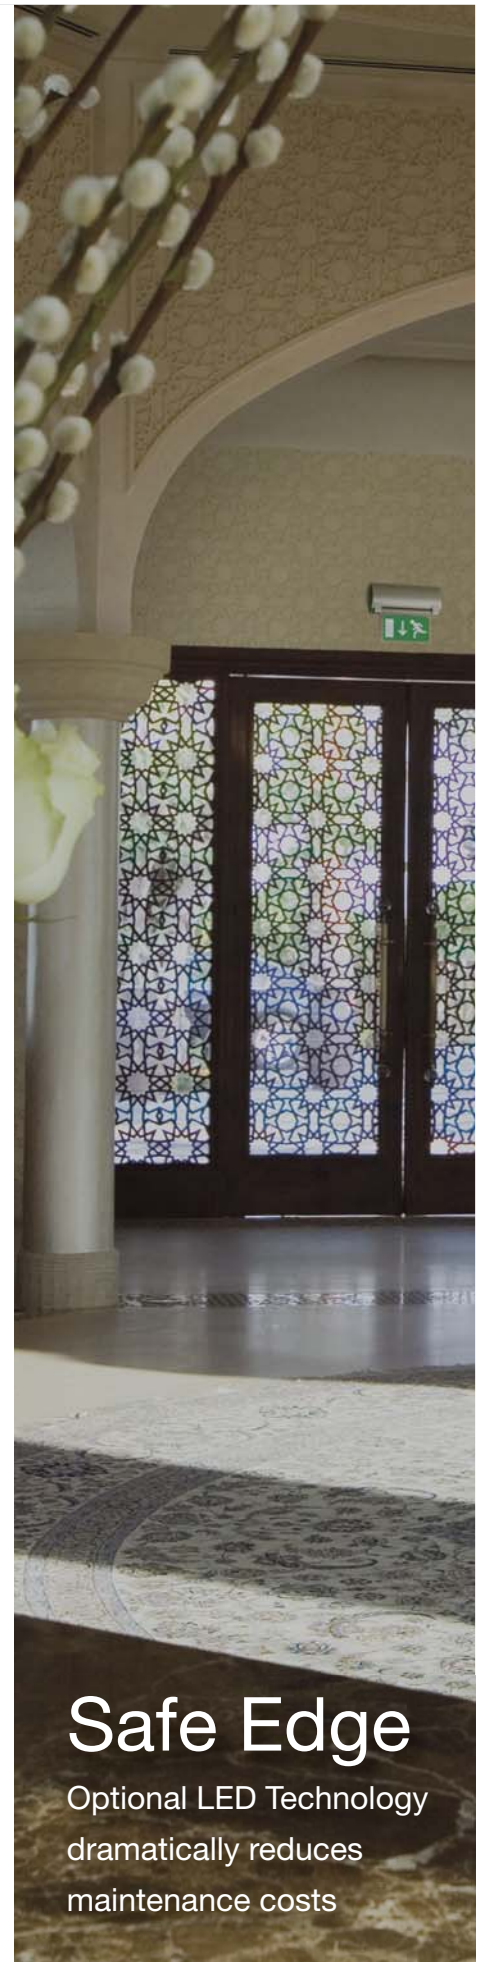





IP20



Safe Edge

Optional LED Technology
dramatically reduces
maintenance costs

Order codes

Safe Edge Luminaire (Fluorescent)	White Finish	Silver Finish	Weight (kg)
Mtd/NM 3hr Self contained	NSED	NSEDS	1.8
Intellem Self Check Mtd/NM 3hr	NSEDIS	NSEDSIS	1.8
CeaGuard slave	NSED230CG	NSEDS230CG	1.6
24V AC/DC Central system slave	NSED24	-	1.6
50V AC/DC Central system slave	NSED50	-	1.6
110V AC/DC Central system slave	NSED110	-	1.6
230V AC Static inverter system slave	NSED230	NSEDS230	1.6
Safe Edge Luminaire (LED)	White Finish	Silver Finish	Weight (kg)
Mtd/NM 3hr Self contained	NSLED	NSLEDS	1.9
230V AC Static inverter system slave	NSLEDS230	NSLEDS230S	1.7
Legend panels (Signs directive format)	Pictogram	Cat No	Weight (kg)
Single sided panel. Down arrow		LUCADS	0.35
Double sided panel. Left and right arrow		LUCALR	0.35
Double sided panel. Down arrow		LUCAD	0.35
Legend panels (BS5499 format)	Pictogram	Cat No	Weight (kg)
Single sided panel. Down arrow BS5499		LUCDS5499	0.35
Double sided panel. Down arrow BS5499		LUCD5499	0.35
Double sided panel. Left and right arrow BS5499		LUCLR5499	0.35
Single sided panel. Left arrow BS5499		LUCL5499	0.35
Single sided panel. Right arrow BS5499		LUCR499	0.35

Cooper Lighting and Safety Ltd
Wheatley Hall Road, Doncaster, South Yorkshire. DN2 4NB
www.cooper-ls.com

Sales
T: +44 (0)1302 303303
F: +44 (0)1302 367155
E: sales@cooper-ls.com

General
T: +44 (0)1302 321541
F: +44 (0)1302 303220
E: technical@cooper-ls.com

Major Projects London
T: +44 (0)1992 787999
F: +44 (0)1992 787222
E: london@cooper-ls.com

Export
T: +44 (0)1302 303250
F: +44 (0)1302 303251
E: export@cooper-ls.com