




Gladiator Wallpack brings the rare mix of functionality and aesthetics together in this good looking, yet well specified, luminaire. The heavy duty Aluminium base casting has the facility of either side conduit or BESA entry and also accommodates the photocell where automatic dawn to dusk operation is required. Gladiators curved profile diffuser is manufactured from vandal resistant Polycarbonate and has a sleek appearance when compared to traditional outdoor bulkheads. The diffuser fully hinges aiding installation and maintenance and a stainless steel six point fastening system ensures that its IP65 rating is maintained at all times. 70w SON and MBI lamp types are complemented by 26w and 42w low energy compact fluorescent versions which are also available with integral 3 hour maintained emergency facility. Ideal for building entrances and perimeter walkways, the 26w emergency model at a 3m mounting height provides a 1 Lux average in emergency mode whilst still allowing 6m spacing between luminaires.

- Robust, die cast aluminium base with conduit and BESA entry
- Attractive, curved profile diffuser in vandal resist polycarbonate
- High Output 70w SON and MBI versions
- Low energy 26w and 42w models also available as 3 Hour emergency version
- IP65 rated, Dust Tight and Jet Proof
- Fully hinged diffuser for ease of installation and maintenance
- Dawn to Dusk photocell control available on all models
- Supplied complete with lamp

Catalogue Numbers


Lamp	Rating	Description	Cat No	Weight (Kg)
70w	SON E	Gladiator Wallpack 70w SON	GLR70S	2.90
70w	SON E	Gladiator Wallpack 70w SON & P/cell	GLR70SPC	2.94
70w	MBI T	Gladiator Wallpack 70w MBI	GLR70MH	3.04
70w	MBI T	Gladiator Wallpack 70w MBI & P/cell	GLR70MHPC	3.08
26w	4 pin CFL	Gladiator Wallpack 26w CFL	GLR126Z	2.21
26w	4 pin CFL	Gladiator Wallpack 26w CFL & P/cell	GLR126ZPC	2.25
26w	4 pin CFL	Gladiator Wallpack 26w CFL Emergency	EBGLR126Z	3.38
26w	4 pin CFL	Gladiator Wallpack 26w CFL Emergency & P/cell	EBGLR126ZPC	3.42
42w	4 pin CFL	Gladiator Wallpack 42w CFL	GLR142Z	2.21
42w	4 pin CFL	Gladiator Wallpack 42w CFL & P/cell	GLR142ZPC	2.25
42w	4 pin CFL	Gladiator Wallpack 42w CFL Emergency	EBGLR142Z	3.38
42w	4 pin CFL	Gladiator Wallpack 42w CFL Emergency & P/cell	EBGLR142ZPC	3.42

Dimensions

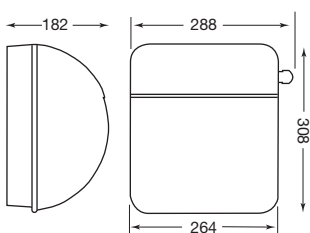


Photometric Data & Isoline Diagrams

70W SON

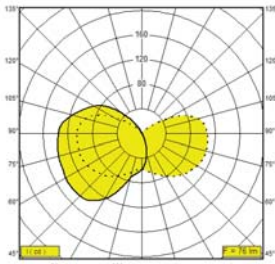


ULOR: 25.7%
DLOR: 50.0%
LOR: 75.7%

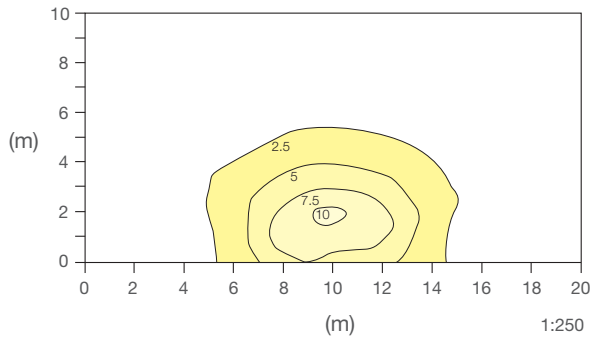


Floor Isolux
GLR1705
Mounting Height = 3m

26W CFL

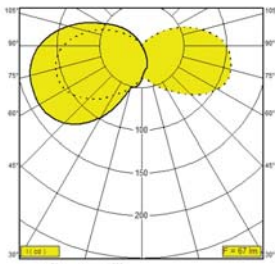


ULOR: 19.3%
DLOR: 47.2%
LOR: 66.5%

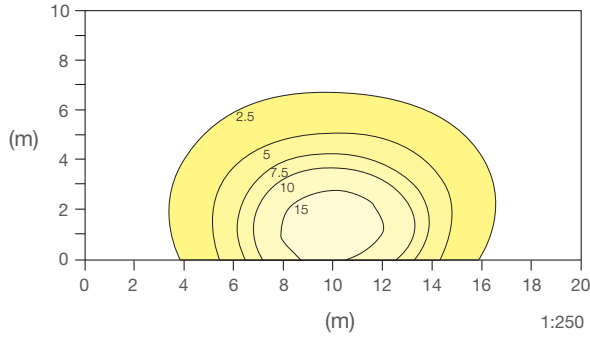


Floor Isolux
GLR126Z
Mounting Height = 3m

42W CFL

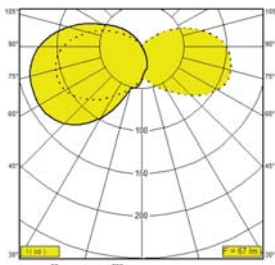

ULOR: 19.5%
DLOR: 47.7%
LOR: 67.2%

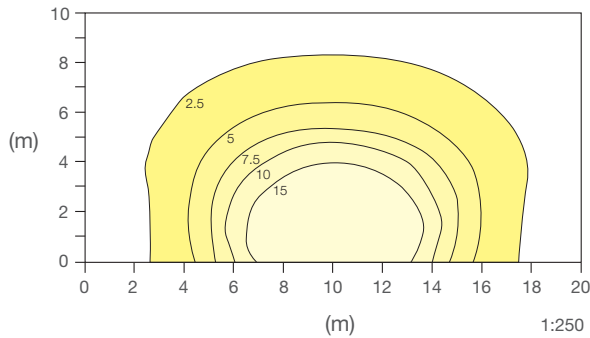

Floor Isolux
GLR142Z
Mounting Height = 3m

Luminaire Spacings at Mid Point LUX Level

Lamp	5 Lux	10 Lux	15 Lux	20 Lux
70W SON	15.0m	11.0m	9.5m	8.0m
70W MBI	12.5m	9.0m	8.0m	7.0m
26W CFL	10.0m	6.0m	4.5m	2.0m
42W CFL	13.0m	9.5m	7.5m	6.0m

Emergency Luminaire Spacings at Mid Point LUX Level

Lamp	0.25 Lux	0.5 Lux	1 Lux
26W CFL	12.2m	8.2m	3.4m
42W CFL	14.2m	10.6m	7.4m

Cooper Lighting and Safety Ltd
Wheatley Hall Road, Doncaster, South Yorkshire. DN2 4NB
www.cooper-ls.com

Sales
T: +44 (0)1302 303303
F: +44 (0)1302 367155
E: sales@cooper-ls.com

General
T: +44 (0)1302 321541
F: +44 (0)1302 303220
E: technical@cooper-ls.com

Major Projects London
T: +44 (0)1992 787999
F: +44 (0)1992 787222
E: london@cooper-ls.com

Export
T: +44 (0)1302 303250
F: +44 (0)1302 303251
E: export@cooper-ls.com